

Mini ODF for 12 to 24 Cores Termination

Wall and Pole Mount, SC Simplex and LC Duplex Adapters


Infinique's IFWMDBP12 is excellent in features and flexibility and are ideal for use as a multi-user telecommunication outlet as specified in TIA-568-C.1. IFWMDBP12 supports termination up to 24 cores and it accommodates 12 SC Simplex Adapters for 12 cores and 12 LC Duplex Adapters for 24 cores terminations. Compact in size and with built-in fiber management tray enables isolation, proper routing of cables with a plug and play solution.

Designed with convenient hinge and press-n-pull lock box mechanism, and comes with mounting screws for speedy installation. Designed with rugged construction they are suitable for both wall and pole mount applications. Widely used in FTTH Applications, they can also be deployed in IDFs for CCTV, Telephone, IPTV and Data communication applications. It has rugged construction and is made of fire retardant ABS UL-94V0 material.

MINI ODF CONSTRUCTION



DIMENSIONS

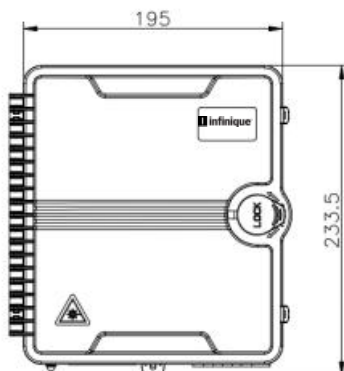

Features and Benefits

- Reliable Performance**
 Compliant with IEC, EIA/TIA, Telcordia GR-326 Standards for cable slack, maintains minimum bend radius
- Rugged Construction**
 Rugged Construction with IP65 Rating and suitable for wall and pole mount applications
- High Density Terminations**
 Supports up to 24 terminations, 12 with 12 SC Simplex Adapters and 24 with 12 LC Duplex Adapters
- High Capacity Cable Entry Ports**
 Comes with a total of 14 ports. 2 Ports with cable diameter of 12mm and 12 Ports for FTTH cable
- Speedy Installation**
 Convenient hinge and press-n-pull lock box with mounting screws for speedy installation

Mini ODF for 12 to 24 Cores Termination

Wall and Pole Mount, SC Simplex and LC Duplex Adapters

OPTICAL SPECIFICATIONS		
Mounting Type	Wall or Pole Mount	
Fiber Cores	SC Simplex 12 Cores and LC Duplex 24 Cores Termination	
Adapters Port	12 Ports	
Adapters	SC Simplex, LC Duplex	
Material	ABS UL-94V0 Material	
Color	Gray	
Cable Ports	Total 14 Ports. 2 Ports with cable diameter of 12mm and 12 Ports for FTTH cable	
Dimensions (W x D x H) mm	212.5 x 71.5 x 233.5	
TEMPERATURE RANGE		
Installation and Assembly (°C)	-20 to +60	
Operating Temperature (°C)	-25 to +75	
Storage Temperature (°C)	-40 to +85	
STANDARDS		
IEC, EIA/TIA, Telcordia GR-326 Standards		
PACKING		
Mini ODF is packed individually in separate packing box along with splice protection sleeves.		
ORDERING INFORMATION		
Part Number	Description	Adapters
IFWMBBP12	Infinique ABS Wall or Pole Mount Mini ODF Distribution Box, 12 Ports, SC Simplex, LC Duplex Unloaded	SC Simplex, LC Duplex



Infinique, a Canadian company is a manufacturer of high performing end-to-end solutions in copper, fiber and video surveillance systems. For more information visit our website at www.infinique.com or email us at sales@infinique.com.