

Mini ODF for 24 to 48 Cores Termination

Wall and Pole Mount, SC Simplex and LC Duplex Adapters


Infinique's IFWMDBP24 is excellent in features and flexibility and are ideal for use as a multi-user telecommunication outlet as specified in TIA-568-C.1. IFWMDBP24 supports termination up to 48 cores and it accommodates 24 SC Simplex Adapters for 24 cores and 24 LC Duplex Adapters for 48 cores terminations. Compact in size and with built-in fiber management tray enables isolation, proper routing of cables with a plug and play solution.

Designed with convenient hinge and press-n-pull lock box mechanism, and comes with mounting screws for speedy installation. Designed with rugged construction they are suitable for both wall and pole mount applications. Widely used in FTTH Applications, they can also be deployed in IDFs for CCTV, Telephone, IPTV and Data communication applications. It has rugged construction and is made of fire retardant ABS UL-94V0 material.

MINI ODF CONSTRUCTION



DIMENSIONS

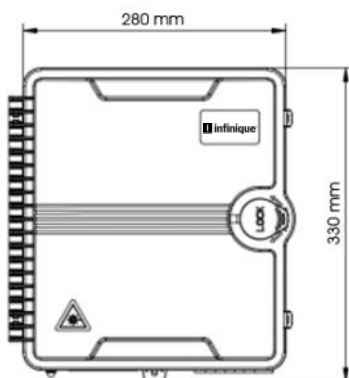

Features and Benefits

- Reliable Performance**
 Compliant with IEC, EIA/TIA, Telcordia GR-326 Standards for cable slack, maintains minimum bend radius
- Rugged Construction**
 Rugged Construction with IP65 Rating and suitable for wall and pole mount applications
- High Density Terminations**
 Supports up to 48 terminations, with 24 SC Simplex and 24 LC Duplex Adapters
- High Capacity Cable Entry Ports**
 Comes with a total of 26 ports. 2 Ports with cable diameter of 12mm and 24 Ports for FTTH cable
- Speedy Installation**
 Convenient hinge and press-n-pull lock box with mounting screws for speedy installation

Mini ODF for 24 to 48 Cores Termination

Wall and Pole Mount, SC Simplex and LC Duplex Adapters

OPTICAL SPECIFICATIONS

Mounting Type	Wall or Pole Mount
Fiber Cores	SC Simplex 24 Cores and LC Duplex 48 Cores Termination
Adapters Port	24 Ports
Adapters	SC Simplex, LC Duplex
Material	ABS UL-94V0 Material
Color	Gray
Cable Ports	Total 26 Ports. 2 Ports with cable diameter of 12mm and 24 Ports for FTTH cable
Dimensions (W x D x H) mm	280 x 95 x 330

TEMPERATURE RANGE

Installation and Assembly (°C)	-20 to +60
Operating Temperature (°C)	-25 to +75
Storage Temperature (°C)	-40 to +85

STANDARDS

IEC, EIA/TIA, Telcordia GR-326 Standards

PACKING

Mini ODF is packed individually in separate packing box along with splice protection sleeves.

ORDERING INFORMATION

Part Number	Description	Adapters
IFWMDBP24	Infinique ABS Wall or Pole Mount Mini ODF Distribution Box, 24 Ports, SC Simplex, LC Duplex Unloaded	SC Simplex, LC Duplex



Infinique, a Canadian company is a manufacturer of high performing end-to-end solutions in copper, fiber and video surveillance systems. For more information visit our website at www.infinique.com or email us at sales@infinique.com.